



COIL ROD SERIES

SUPERTIE™

FIBERGLASS FORM-TIE SYSTEMS



US Patent #7,819,388



Reduces Form-Tie Costs up to 70%



SUPERTIE™ vs METAL COIL ROD


Reduced Labor Costs – No plugging, patching or sacking.

Reusable Parts – Simply strip hardware from form, reuse over 100 times.

Superior Finishes – Eliminates rust and corrosion. Strips flush to concrete.

Variety of Colors – We offer colors to blend with the wall. Custom colors available.

Reduced Inventory – **ONE** SuperTie™ fits any wall width.

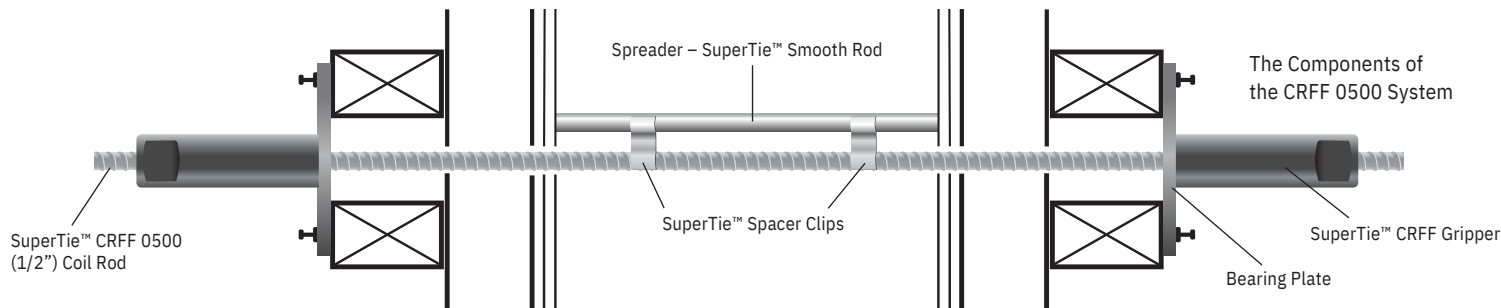

Strip Form



Cut Flush



Tie Disappears

NEVER PATCH . . . NEVER RUST

Three System Strengths

- 1/2" dia. Coil Rods – 7,500 lbs safe working load
- 3/4" dia. Coil Rods – 12,000 lbs safe working load
- 1" dia. Coil Rods – 17,000 lbs safe working load

Note: The use of our form components are required to attain these strengths.

Compatible – SuperTie™ Coil Rod Form Fixtures are most commonly used with job-built plywood, 2"×4" forms and hand-set modular forms. The fiberglass rod diameters are compatible with commercial forming systems.

Extends Form Life – All forms and form liners strip easily from the structure without damage from the ties saving money and time.



RJD Industries, LLC
1508 W Stone Field Way, Ogden, UT 84404
(800) 344-4753

Technical questions:
Info@rjdindustries.com

